




Specialist for Pumping Technology

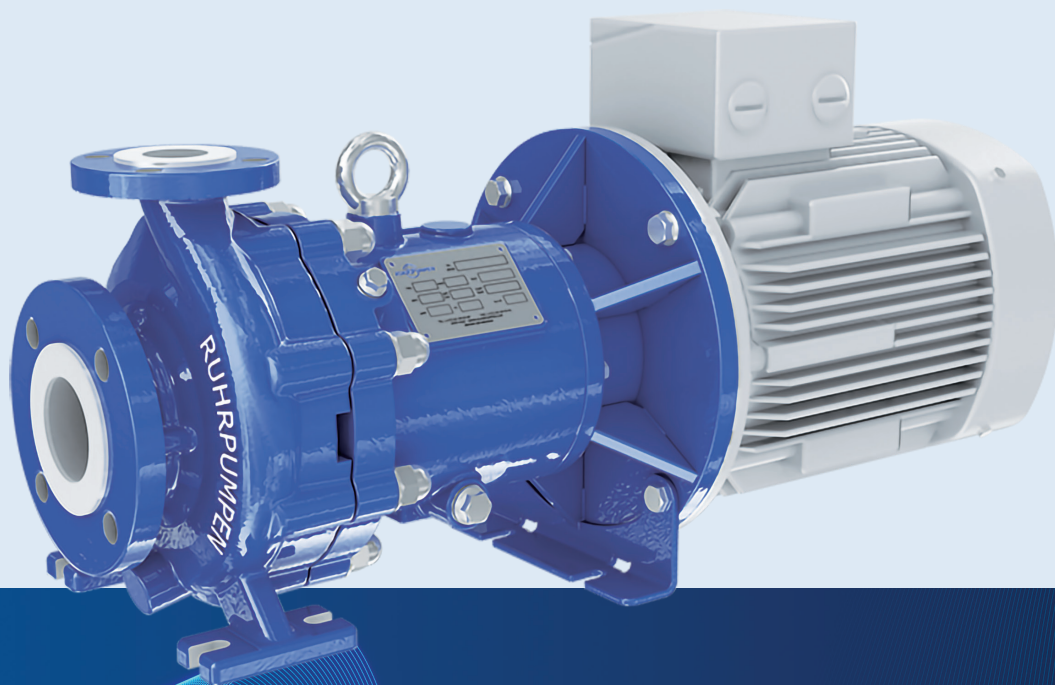

CRP-M CC

**Centrifugal Pump with Permanent Magnetic Drive Closed
Coupled according to DIN EN 2858 and DIN EN ISO 15783**

CRP-M CC

Centrifugal Pump with Permanent Magnetic Drive

+75 years developing the pumping technology that drives progress

Ruhrpumpen is an innovative and efficient pump technology company that offers highly engineered, custom made solutions for oil & gas, chemical processing, power generation, industrial applications and water.

Implementation of cutting-edge technology and world-class engineering, combined with our unique vertically integrated structure, allows Ruhrpumpen to design complex technical solutions, creating the most robust and powerful pump systems in the marketplace.

Our broad product line complies with the most demanding quality standards and industry specifications such as **American Petroleum Institute (API), American National Standards Institute (ANSI), Underwriter's Laboratories (UL), Factory Mutual (FM), National Fire Protection Association (NFPA), ISO and Hydraulic Institute.**

Products Include:

- Single stage overhung pumps
- Vertical in-line pumps
- Single and multi-stage between bearing pumps
- Multi-stage vertical pumps
- Reciprocating plunger pumps
- Sealless magnetic drive pumps
- Fire protection systems
- Pitot tube pumps
- Hydraulic decoking systems
- Horizontal pumping systems



Ruhrpumpen is your single source supplier

- Original Equipment
- Spare parts
- Installation and startup support
- Repair and maintenance
- Engineering, training and consulting
- Reverse engineering

Benefits of our pumps

- Proven reliability
- High efficiency designs ensure lowest operating cost
- Robust design allows for long system life with minimal maintenance
- Optimized total cost of ownership

CRP-M CC Pump

The CRP-M Productline has been expanded by another type of pump. The CRP-M CC is based on the CRP-M pump except that the bearing support is not required. The driver is connected by an adapter flange to the intermediate lantern. The driver shaft is directly connected to the outer magnet carrier so that the torque of the driver is transmitted to the magnetic coupling. The main advantages of this design are the following:

- lower production and maintenance costs
- a more compact design of the pump assembly
- no maintenance of the roller bearings
- less friction and thus less power losses
- alignment of the pump deleted



The CRP-M CC Pump Complementary Design

The hydraulic of this new pump type CRP-M CC is identical to the CRP-M range and is completely new calculated and designed, therefore high efficiencies and low NPSHr values can be achieved. The CRP-M CC pump range is equipped with a permanent magnetic drive in accordance with DIN EN 2858 and DIN EN ISO 15783 and strikes new paths especially for the design of the Journal Bearings, Internal Flows and Pressures, Magnetic Drive System and Axial Thrust Balancing.

As a 100% leakage free pump the CRP-M CC avoids high maintenance costs and usage of mechanical seals. It is also the best option for taking care of the environment and meets the requirements of the TA-Luft specification (German Technical Instruction on Air Quality Control).

The CRP-M CC pump is built with the latest engineering techniques and tools such as 3D Modeling, Finite-Element Analysis and CFD-Simulation – Computational Fluid Dynamics - to assure our customers the best product quality.

Standard Material

Individual Parts	Material	Material
Volute Casing	1.0619 (Carbon Steel)	1.4408 (316 AUS)
Impeller	1.4408 (316 AUS)	1.4408 (316 AUS)
Containment Shell	2.4610 (Hastelloy C)	2.4610 (Hastelloy C)
Inner Magnet Rotor	1.4571 (316 AUS)	1.4571 (316 AUS)
Pump Shaft	1.7225 (AISI 4140)	1.4571 (316 AUS)
Drive Shaft	1.7225 (AISI 4140)	1.7225 (AISI 4140)
Intermediate Lantern	1.0619 (Carbon Steel)	1.0619 (Carbon Steel)
Motor Latern	1.0619 (Carbon Steel)	1.0619 (Carbon Steel)



Centrifugal Pump with Permanent Magnetic Drive

Selection Chart CRP-M CC

The chart displays the performance of the 100-065-125 pump model across a range of flow rates and total head. The y-axis represents Total Head in feet (0 to 200) and meters (0 to 80). The x-axis represents Flow in lpm (0 to 300) and gpm (0 to 20). The chart includes performance curves for various speed and impeller diameter combinations, with the 100-065-125 model highlighted in dark blue. The curves show that the pump can maintain a total head of approximately 12.5 feet at a flow rate of 15 lpm (4 gpm) when operating at 1750 rpm with a 125 mm impeller diameter.

Model	Speed (rpm)	Impeller Diameter (mm)	Flow (lpm)	Flow (gpm)	Total Head (ft)	Total Head (m)
100-065-125	1750	125	15	4	12.5	3.8
100-065-160	1750	160	20	5.3	17.5	5.3
100-065-200	1750	200	25	6.6	22.5	6.8
100-065-250	1750	250	30	7.9	27.5	8.3
080-050-125	1450	125	12	3.2	10.5	3.2
080-050-160	1450	160	16	4.2	14.0	4.3
080-050-200	1450	200	20	5.2	17.5	5.3
080-050-250	1450	250	24	6.3	21.0	6.4
065-040-125	1150	125	10	2.6	8.5	2.6
065-040-160	1150	160	13	3.4	11.0	3.4
065-040-200	1150	200	16	4.2	14.0	4.3
065-040-250	1150	250	19	5.1	17.0	5.1
050-032-125	900	125	8	2.1	6.5	2.0
050-032-160	900	160	10	2.6	8.5	2.6
050-032-200	900	200	12	3.2	11.0	3.2
050-032-250	900	250	15	4.0	13.5	4.0
040-025-125	700	125	6	1.6	4.5	1.4
040-025-160	700	160	8	2.1	6.0	1.8
040-025-200	700	200	10	2.6	8.0	2.4
040-025-250	700	250	12	3.2	10.0	3.0

Selection Chart CRP-M CC


The chart displays the performance of the 040-025-125 pump at different speeds and with different impeller diameters. The y-axis represents Total Head in feet (0 to 200) and meters (2 to 100). The x-axis represents Flow in gpm (0 to 300), l/s (0.3 to 20), and m³/h (1.5 to 80). The chart includes performance curves for the following configurations:

- 040-025-125 (Base configuration)
- 040-025-160
- 040-025-200
- 050-032-125
- 050-032-160
- 050-032-200
- 065-040-160
- 065-040-200
- 065-040-250
- 080-050-125
- 080-050-160
- 080-050-200
- 080-050-250
- 100-065-125
- 100-065-160
- 100-065-200
- 100-065-250

Each curve is labeled with its corresponding configuration. The chart shows that total head decreases as flow increases and as the pump speed or impeller diameter increases.


Selection Chart CRP-M CC

2900 RPM
2 POLES
— 50 Hz

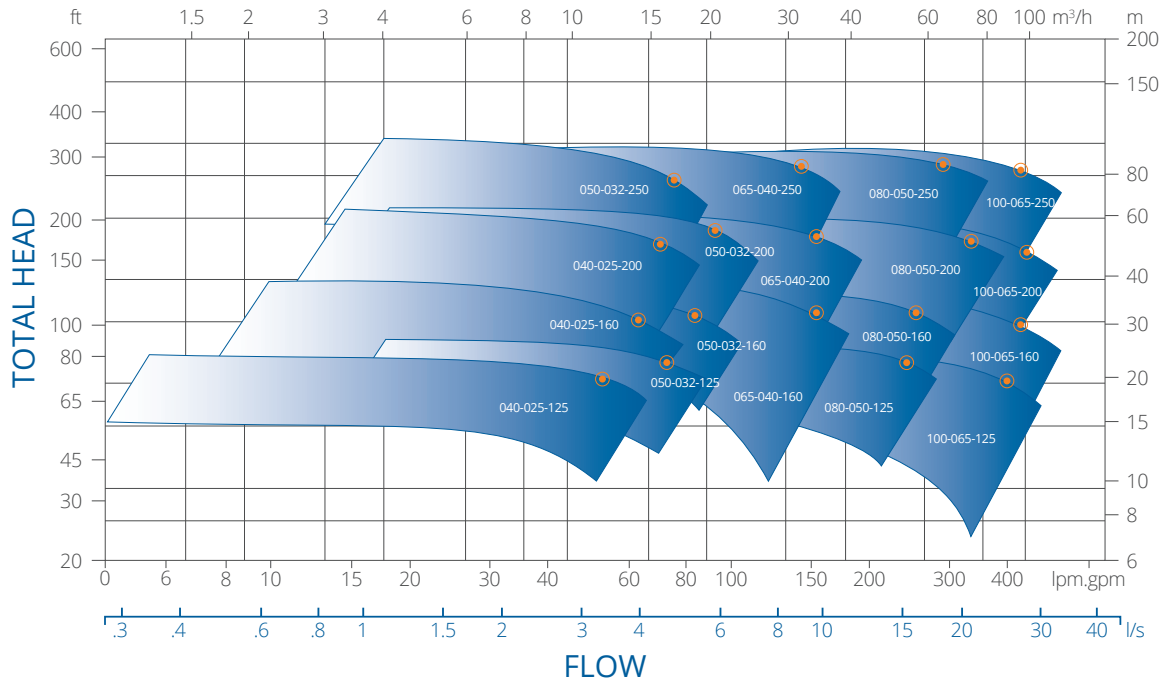


Selection Chart CRP-M CC

3500 RPM
2 POLES
— 60 Hz

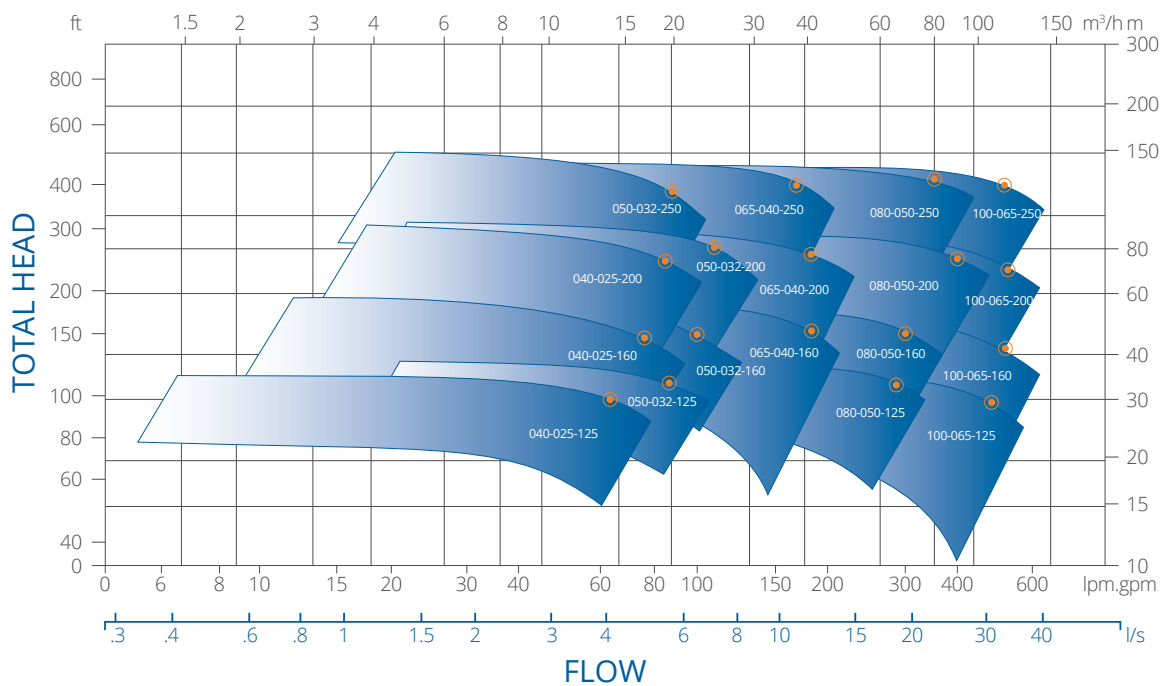

Characteristics

- 1 Volute Casing Pump**
Designed for 16 bar at 120°C, foot mounted.
- 2 Casing Gasket**
Only two static gaskets on casing and containment shell. The gaskets are certified to TA-Luft specification.
- 3 Renewable Wear Rings**
Full complement of renewable casing and casing cover wear rings are standard.
- 4 Journal Bearings. (Patent Pending)**
Spherical design for universal, multiple applications. Axial and radial bearings made of "pure" Sintered Silicon Carbide (SSiC) in standard design.
- 5 Axial Thrust Bearings**
Due to hydraulic measures the axial thrust will be controlled over the complete operating range.
- 6 Internal Flushing System (Patent Pending)**
By careful design of internal flush flow passages, bearings and magnetic drive receive optimal lubrication across the pump curve up to $1.5 \times Q_{opt}$.
- 7 Inner Magnet Rotor**
With an additional rub ring area on the bearing bush housing.
- 8 Internal Filter System**
The self cleaning internal filter is located on the casing cover and prevents unacceptable solid particles from entering through the internal flow system into the magnetic drive and journal bearings. The internal filter is positioned at the highest internal pressure. A control of the operation is possible via a pressure control.
- 9 Intermediate Housing**
With a non-sparking rub ring and a non-sparking ring as fit-up aid for assembly/disassembly.
- 10 Motor Latern**
The latern connects the driver with frame type IM B35 with the intermediate lantern and enables a short design.
- 11 Vibration / Temperature**
Bearing bracket and intermediate lantern are provided with pre-determined permanent locations to inspect vibration and oil/bearing temperature.

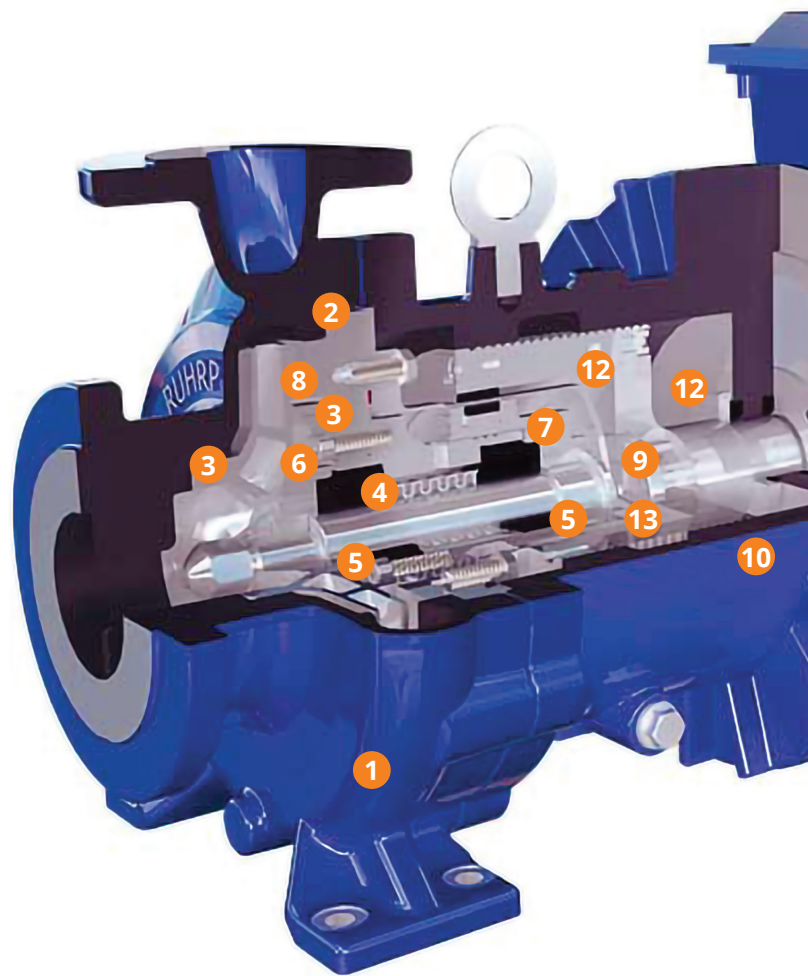

- 12 Ceramic Insulation and Heating Barrier**
To avoid a heat transfer from the end of the containment shell to the front side of the drive shaft and also to the end of the outer magnet rotor, the bottom of the containment shell is insulated with a high temperature resistant ceramic ($1200^{\circ}\text{C}=2192^{\circ}\text{F}$). Also with an additional thermal barrier (option), cast to the bearing bracket, the temperature rise is dissipated over the bearing bracket flange in the cooling fins. This thermal barrier prevents excessive heat transfer to the antifriction bearings, thereby extending bearing life.
- 13 Containment Shell**
The containment shell separates 100% leakage-free the product chamber from the atmosphere and creates a static sealing between the inner and outer magnet rotor. The containment shell is designed in standard for 16 bar at 250°C . The containment shell is self-venting and fully drainable.



CRP-M CC PERFORMANCE DATA

Capacity	620 gpm	up to 140 m ³ /h
Head	480 ft	up to 146 m
Pressure	232 psi at 248°F	up to 16 bar at 120 °C
Temperature	-76°F to 482°F	-60°C to 250°C

Notes:

For pump operations outside this range, please contact a Ruhrpumpen Representative.

Images for general arrangement use only, not certified for construction.

DESCRIPTION

Centrifugal Pump with Permanent Magnetic Drive, designed to meet full DIN EN 2858 and DIN EN ISO 15783 pump standards. Horizontal single stage, foot mounted casing, backpull-out, radially split, end suction, top discharge, single suction.

QUALITY ASSURANCE

All Ruhrpumpen facilities are certified according to ISO 9001.

PUMPING OF

- Acids
- Bases
- Hot transfer oils
- Liquid gases
- Hydrocarbons
- Aggressive, explosive and toxic liquids

MARKETS


- Chemical and Petrochemical Industry
- Tank farms
- Liquid Gas Industry
- Refrigeration and Heat Technology
- Power Plant Technology
- Galvano Technique

Special Configurations and Optional Features

The developed CRP-M CC can be just like the CRP-M series. Please refer to this information, such as the design of the pump with a ceramic containment shell made by zirconium oxide or the use of a full flow filter in the CRP-M brochure.

Secondary Control System

The CRP-M pump in the standard design is equipped with a single containment shell, rated for the Maximum Allowable Working Pressure (MAWP). The intermediate housing, as a secondary pressure casing, is rated for the same pressure as the pressure casing and is equipped with a labyrinth system to the atmosphere. When a secondary control is required, additionally to the **1** Labyrinth system, designed as a throttle, a spiral on the outer magnet rotor, rotating in the opposite direction restricts the escaped liquid in the intermediate housing in case of a containment shell failure. The presence of liquid or the increased pressure can be detected by a monitoring system. The liquid can be drained, controlled through the draining pipe. Even at standstill of the pump, it is ensured that the pump is safe and free of leakage. Two additional **2**. Lip seals are mounted on the motor shaft and they avoid escape of the medium.

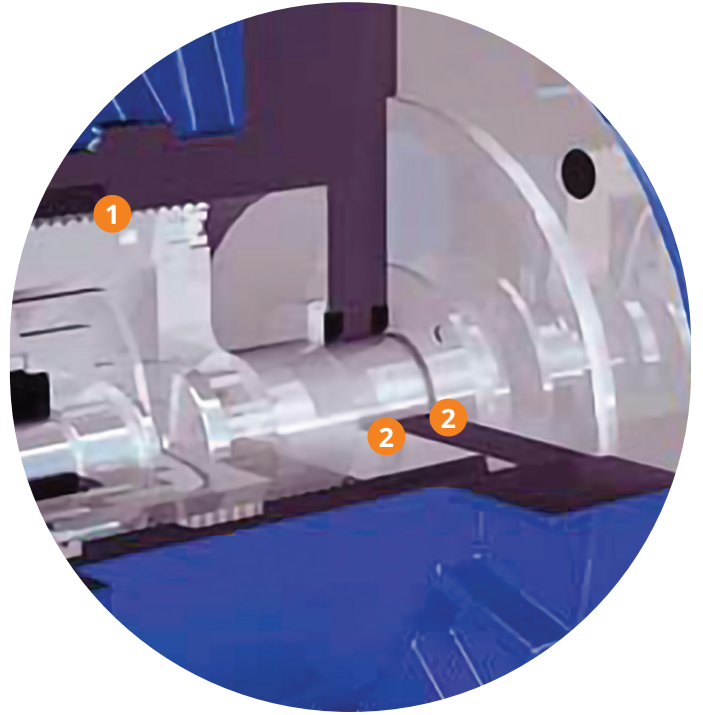


Special Technique and Design Features

JOURNAL BEARING DESIGN

The patent pending axial and double radial journal bearing made of “pure” Sintered Silicon Carbide (SSiC) in standard design is designed with the following features:

- Spherical locking sleeve for axial and radial centering.
- Bearing sleeves with a sphere for axial and radial centering.
- Radial centering of the bearing sleeves in the axial thrust bearings in the same material (SSiC/SSiC) results in the same expansion factor over the complete temperature application range.
- Bearing bushings with double interference fit assembly to avoid axial torsion and radial displacement.
- No edge loads induced by radial loads at the surface of the bearing sleeves and the bearing bushing.

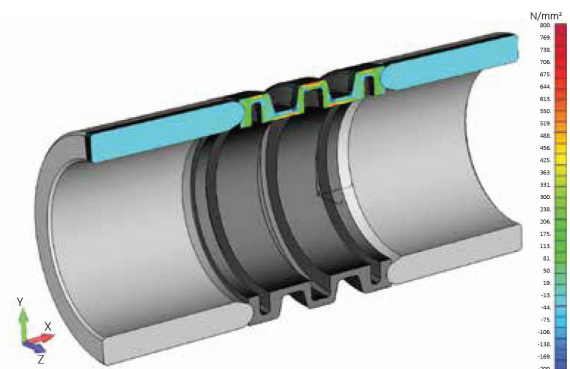



The geometry of the locking sleeve has been calculated with the help of the finite element method (FEM). The exercise was to guarantee the power transmission by the initial load between the rotating parts with different thermal characteristics of the materials (different expansion coefficient between SSiC and stainless steel 1:4), at temperatures up to 350°C (662°F).

Due to the geometry the pre-loaded locking sleeve compensates the differences of the linear expansion caused by the material and thermal between “pure” Sintered Silicon Carbide (SSiC) and the pump shaft made of stainless steel in axial and radial direction. The centering of the rotating bearing parts is always guaranteed.

INTERNAL FLOW AND PRESSURES

A reliable and well-defined pressurization within the flushing system for the magnetic drive and the journal bearings is extremely important for the operation and integrity of the pump. The pressure for both the magnetic drive and internal bearing flush flows is taken from the point of highest pressure location (2) and is fed directly into the magnetic drive and the journal bearings.


The well-defined pressurized internal flush flow into the journal bearings (3) guarantees the necessary heat dissipation and the lubrication within these bearings (4). It is of high importance, that the internal flush flow (5) is fed via a drilling system from a high-pressure point to a low-pressure point (7) into the drilled shaft. The internal flush flow in the front bearing bush is returned by the axial thrust bearing into the pressure chamber (8) behind the impeller. The well-defined pressurized internal flush flow, which is fed into the area of magnetic drive, guarantees the necessary heat dissipation of the magnetic losses. Both these internal flush flows join in the drilled shaft (7) and are also fed by the drilling system into the pressure chamber (8) behind the impeller. This guarantees that this optimized flushing system prevents the vaporization of the product in the pump. The internal flush flow will be fed by the impeller balancing holes from a location of higher pressure into the blades of the impeller.

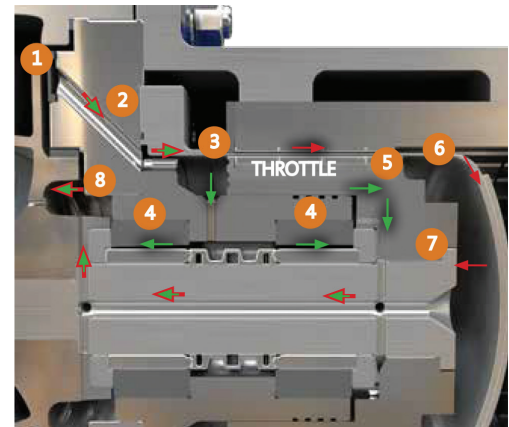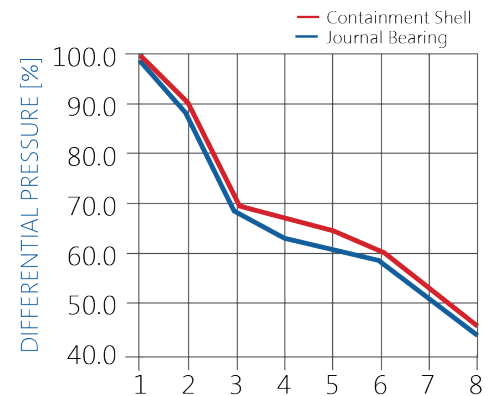

MAGNETIC DRIVE SYSTEM

The magnet drive system transmits the torque without slip by a permanent magnetic field. The magnets made of thermally stable samarium cobalt material (Sm2Co17) are suitable in standard for a maximum allowable operating temperature of 250°C (300°C). Special magnetic drive systems based also on Sm2Co17 material are suitable for an operating temperature up to 450°C.

The central assembly of the magnetic drive system over the journal bearing avoids moment loadings on the journal bearing, thus avoiding eccentric loading of the inner magnet rotor during startup and shut-down.

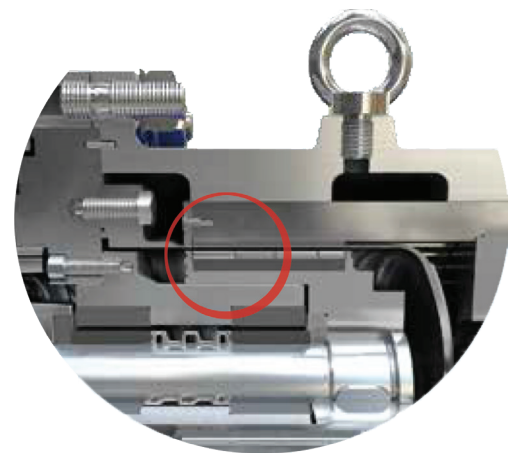

AXIAL THRUST BALANCE










By optimizing the annular areas within the internal flush system the axial thrust will be minimized over the complete operating range up to $Q_{opt.} \times 1.5$. The residual thrust stabilizes the pump rotor axially and is absorbed by the axial thrust bearings. These measures ensure, that products close to the vapor pressure can be handled without limitation, without the risk of vaporization at the axial thrust bearings.

+75 years creating the pumping technology that moves our world

Ruhrpumpen is an innovative and efficient pump technology company that offers highly-engineered and standard pumping solutions for the oil & gas, power generation, industrial, water and chemical markets. We offer a broad range of centrifugal and reciprocating pumps that meet and exceed the requirements of the most demanding quality specifications and industry standards such as API, ANSI, UL, FM, ISO and Hydraulic Institute.



Ruhrpumpen Plants

-  ARGENTINA, Buenos Aires
-  BRAZIL, Rio de Janeiro
-  CHINA, Changzhou
-  EGYPT, Suez
-  GERMANY, Witten
-  INDIA, Chennai
-  MEXICO, Monterrey
-  UK, Lancing
-  USA, Tulsa

-  Manufacturing plant & service center
-  Service center